

The following page(s) are extracted from multi-page Kuhnke product catalogues or CDRoms and any page number shown is relevant to the original document. The PDF sheets here may have been combined to provide technical information about the specific product(s) you have selected.

Hard copy product catalogues, and CDRoms have been published describing Kuhnke Pneumatics, Solenoids, Relays and Electronics; some divided into different books. A list of current publications is available on this web site or from our sales offices. Some may be available for download, but as substantially larger files.

## Contact Details

Kuhnke sales and service in North America

Kuhnke  
Automation Inc.  
P.O Box 1369  
Wayne, N.J.

T: (973) 633 0690  
F: (973) 633 7230  
Email: [sales@kuhnkeusa.com](mailto:sales@kuhnkeusa.com)

### Important Note

The information shown in these documents is for guidance only. No liability is accepted for any errors or omissions. The designer or user is solely responsible for the safe and proper application of the parts, assemblies or equipment described.

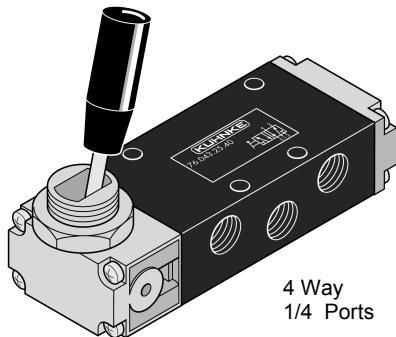
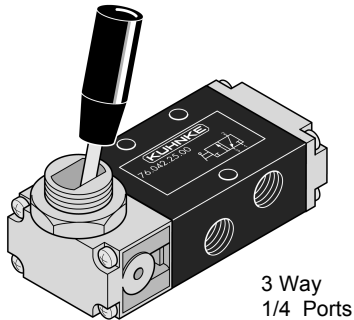


---

# Manually Operated Valves







## General Purpose

Kuhnke Power Valves

### Lever Operator, 2 Position



Lever valves can be used to manually switch air supplies on equipment or operate cylinders and other devices. Valves can be panel mounted or fastened to a surface via body mounting holes. Handles have a contemporary black molded grip and require 3.4 lbs. of force to operate. Valves are available in spring return, pneumatic return and maintained position versions.

Description	Orifice (Body No.)	Port Size	Catalog Number	
			NPT Ports (USA Std.)	Metric Ports (European Std.)
<b>3 Way</b> Maintained Position  	6mm (1S)	1/8	75022-25-00	76022-25-00
	8mm (3S)	1/4	75042-25-00	76042-25-00
<b>3 Way</b> Spring Return  	6mm (1S)	1/8	75022-25-21	76022-25-21
	8mm (3S)	1/4	75042-25-21	76042-25-21
<b>3 Way</b> Pneumatic Reset*  	6mm (1S)	1/8	75022-25-22	76022-25-22
	8mm (3S)	1/4	75042-25-22	76042-25-22
<b>4 Way</b> Maintained Position  	6mm (2S)	1/8	75023-25-40	76023-25-40
	8mm (4S)	1/4	75043-25-40	76043-25-40
<b>4 Way</b> Spring Return  	6mm (2S)	1/8	75023-25-41	76023-25-41
	8mm (4S)	1/4	75043-25-41	76043-25-41
<b>4 Way</b> Pneumatic Reset*  	6mm (2S)	1/8	75023-25-42	76023-25-42
	8mm (4S)	1/4	75043-25-42	76043-25-42

\* Pneumatic Reset Valves operate manually or are returned by a pneumatic signal (35 PSI minimum) applied to an auxiliary 1/8 port.

Operating pressure range is 0-145 PSI. Actuation force @ 90 PSI, is approx. 3.4 Lbs.

For normally open function on 3 way valves, reverse connect ports 1-3. For 2 way operation, plug port 3.

Panel mounting hole size for 1/8-ported valves is 5/8 inch diameter, for 1/4 ported valves, 7/8 inch. Through body mounting holes are 3/16" dia.

Typical dimensions of 4 way 1/8 ported valves are 3.75" L x 1.375" W x .75" D. For 1/4 ported valves: 4.75" L x 2" W x 1" D. For 3 way valves subtract .75" from L dimension. For pneumatic return valves add 1" to L dimension. Allow space for fittings and tubing.

**For valve specifications see appendix. For detail dimensions contact factory.**