

The following page(s) are extracted from multi-page Kuhnke product catalogues or CDRoms and any page number shown is relevant to the original document. The PDF sheets here may have been combined to provide technical information about the specific product(s) you have selected.

Hard copy product catalogues, and CDRoms have been published describing Kuhnke Pneumatics, Solenoids, Relays and Electronics; some divided into different books. A list of current publications is available on this web site or from our sales offices. Some may be available for download, but as substantially larger files.

Contact Details

Kuhnke sales and service in North America

Kuhnke
Automation Inc.
P.O Box 1369
Wayne, N.J.

T: (973) 633 0690
F: (973) 633 7230
Email: sales@kuhnkeusa.com

Important Note

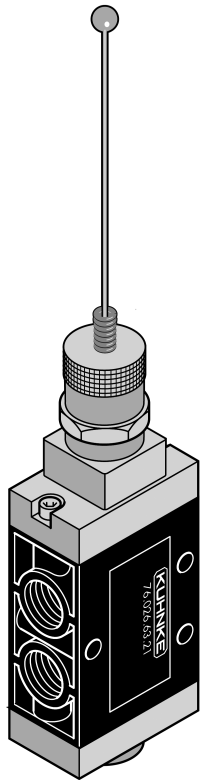
The information shown in these documents is for guidance only. No liability is accepted for any errors or omissions. The designer or user is solely responsible for the safe and proper application of the parts, assemblies or equipment described.

Mechanically Operated Valves






Misc. Operators

Kuhnke Power Valves

Antenna Valve, Air Pilot Assisted



Actuation is caused by deflection of spring supported 4½-inch wire. Can be used to detect passing items on conveyor belts. Allows valve to be mounted close to detected unit and provides a wiping action.

Description	Orifice (Body No.)	Port Size	Catalog Number		
			NPT Ports (USA Std.)	Metric Ports (European Std.)	
3 Way Norm. Closed Spring Return		6mm (9P)	1/8	75026-63-21	76026-63-21
3 Way Norm. Open Spring Return		6mm (9P)	1/8	75026-63-31	76026-63-31
3 Way Norm. Closed Spring Return		8mm (6P)	1/4	75046-63-21	76046-63-21
4 Way Spring Return (Spool Valve)		6mm (1mS)	1/8	(Not Available)	76123-63-41
4 Way Spring Return (Poppet Valve)		6mm (1mP)	1/8	(Not Available)	76127-63-41

Valve operating pressure range is 35-145 PSI. Minimum pressure 35 PSI. Actuation force @ 90 PSI, is approx. 6 ounces.

Body dimensions for 1/8 ported valves are 2.75" L (3 way), 3.5" L (4 way) x 1.375" H x .75" W. Approximate valve body dimensions for 1/4 ported valves are 4.75" L x 2" H x 1" W.

Through body mounting holes 3/16".

For valve specifications see appendix. For detail dimensions contact factory.