



The following page(s) are extracted from multi-page Kuhnke product catalogues or CDROMs and any page number shown is relevant to the original document. The PDF sheets here may have been combined to provide technical information about the specific product(s) you have selected.

Hard copy product catalogues, and CDROMs have been published describing Kuhnke Pneumatics, Solenoids, Relays and Electronics; some divided into different books. A list of current publications is available on this web site or from our sales offices. Some may be available for download, but as substantially larger files.

Contact Details

Kuhnke sales and service in North America

Ellis/Kuhnke Controls
132 Lewis Street
Unit A-2, Eatontown
NJ 07724
USA

T: (973) 633 0690
F: (973) 633 7230
Email: sales@kuhnkeusa.com

Important Note

The information shown in these documents is for guidance only. No liability is accepted for any errors or omissions. The designer or user is solely responsible for the safe and proper application of the parts, assemblies or equipment described.


Fittings and Misc. Accessories

Series 50 Quick Connects


Kuhnke System Logic Devices

Brass Quick Connect Couplings

Coupling Master




Coupling pictured with connector.

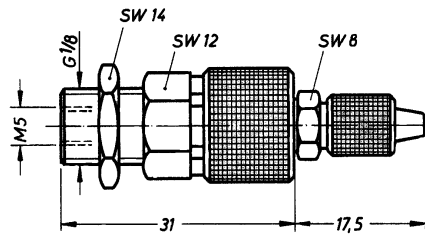

- 50061-01** Blue
- 50061-02** Red
- 50061-03** Green
- 50061-04** Yellow
- 50061-05** Black
- 50061-06** White
- 50061-10** Steel Blue


Connector

50062 G 1/8 Female




Connector

50063 G 1/8 Male




Connector

50065 For 5 mm Tubing



Connector

50064 For 6 mm Tubing



All dimensions in millimeters.

Male metric threads do not fit 10-32 NPT ports without damaging threads. Female M5 ports accept either M5 or 10-32 NPT male fittings.

Fittings with G1/8 male threads fit both Metric and NPT ports.