



The following page(s) are extracted from multi-page Kuhnke product catalogues or CDROMs and any page number shown is relevant to the original document. The PDF sheets here may have been combined to provide technical information about the specific product(s) you have selected.

Hard copy product catalogues, and CDROMs have been published describing Kuhnke Pneumatics, Solenoids, Relays and Electronics; some divided into different books. A list of current publications is available on this web site or from our sales offices. Some may be available for download, but as substantially larger files.

Contact Details

Kuhnke sales and service in North America

Ellis/Kuhnke Controls
132 Lewis Street
Unit A-2, Eatontown
NJ 07724
USA

T: (973) 633 0690
F: (973) 633 7230
Email: sales@kuhnkeusa.com

Important Note

The information shown in these documents is for guidance only. No liability is accepted for any errors or omissions. The designer or user is solely responsible for the safe and proper application of the parts, assemblies or equipment described.

The following page(s) are extracted from multi-page Kuhnke product catalogs or CDROMs and any page number shown is relevant to the original document. The PDF sheets here may have been combined to provide technical information about the specific product(s) you have selected.

Hard copy product catalogs, and CDROMs have been published describing Kuhnke Pneumatics, Solenoids, Relays and Electronics; some divided into different books. A list of current publications is available on this web site or from our sales offices. Some may be available for download, but as substantially larger files.

Contact Details

Kuhnke sales and service in North America

Ellis/Kuhnke Controls
26 West Highland Avenue
Atlantic Highlands
New Jersey 07716
USA

T: 800-221-0714

T: 732-291-3334

F: 732-291-8154


Email: sales@kuhnkeusa.com

Important Note


The information shown in these documents is for guidance only. No liability is accepted for any errors or omissions. The designer or user is solely responsible for the safe and proper application of the parts, assemblies or equipment described.

Instant push-In Fittings for 6mm (1/8") O.D. Tubing


Stud Coupling
G 1/8 56010




L – Banjo
G 1/8 56090




T – Banjo
G 1/8 56100




T – Banjo
G 1/8 56105




Bulkhead Coupling
56030




Elbow Coupling
56040




T – Coupling
56050



Y – Coupling
(2) 4mm tube push-ins 56025

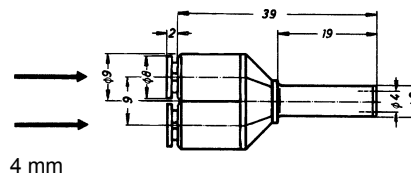

Reducer
(1) 4mm push in 52015



All dimensions in millimeters.

Push-in fittings accept 1/8" tubing with a wall thickness of up to 3/64".

Male metric threads do not fit 10-32 NPT ports without damaging threads. Female M5 ports accept either M5 or 10-32 NPT male fittings.

Fittings with G1/8 male threads fit both Metric and NPT ports.